

Article - e003

Design and Experimental Validation of an Autonomous Ground Robot with Adaptive Camouflage and AI-Based Drone Detection for Border Surveillance

Dr. Neeraj Prakash Kulkarni¹  , Pranjal Anand Rajmane²

¹Department of Mechanical Engineering, Dr. Babasaheb Ambedkar Technological University,
Lonere, India

²Department of Nutrition Dietetics, Gopal Krishn Gokhale College, India

Received: 15/03/2026

Revision Received: 08/04/2026

Accepted: 24/04/2026

ABSTRACT

Border surveillance in complex and dynamic environments demands intelligent systems capable of autonomous operation, real-time threat detection, and adaptive concealment. Conventional monitoring methods often suffer from limited coverage, delayed response, and high human dependency. To address these challenges, this study presents the design and experimental validation of an autonomous ground robot integrated with adaptive camouflage and artificial intelligence-based drone detection for border surveillance applications. The proposed system combines a mechanically optimized ground vehicle, an adaptive camouflage mechanism for environmental blending, and a deep learning-based vision module for detecting aerial drones and human intrusions. Internet of Things (IoT) architecture enables real-time monitoring, remote control, and data transmission under field conditions. Mechanical integrity and aerodynamic stability of the platform are validated through structural, modal, and computational fluid dynamics analyses. Experimental results demonstrate high detection accuracy for both aerial and ground targets, with low communication latency and reliable system responsiveness. The adaptive camouflage mechanism improves concealment effectiveness across varying terrain conditions. The integrated framework shows robust performance during real-time field trials, confirming its suitability for autonomous border surveillance tasks. The proposed system offers a scalable and cost-effective solution for intelligent surveillance applications, with potential extensions toward multi-robot coordination and advanced threat response strategies.

KEYWORDS: Adaptive Camouflage System, AI-based Surveillance, Autonomous Ground Robot, Border Surveillance Technology

1. INTRODUCTION

Securing international borders remains a critical challenge due to increasing infiltration attempts, unauthorized aerial surveillance, and hostile reconnaissance activities. Traditional border monitoring approaches, such as fixed surveillance towers and manual patrols, often lack adaptability, rapid response capability, and continuous situational awareness. These limitations have motivated the development of autonomous surveillance systems capable of operating with minimal human intervention while maintaining high detection reliability. Recent advancements in robotics, artificial intelligence, and sensor technologies have enabled autonomous ground vehicles

to perform complex surveillance tasks in unstructured environments. Ground robots equipped with intelligent perception systems can provide persistent monitoring, reduce manpower requirements, and operate in hazardous zones. However, two major challenges continue to limit their effectiveness: vulnerability to detection and the growing threat posed by low-altitude unmanned aerial vehicles (UAVs). Adaptive camouflage has emerged as an effective technique for reducing the visual detectability of robotic platforms by enabling real-time adaptation to surrounding environmental conditions. When combined with artificial intelligence-based perception, such systems can significantly enhance stealth and survivability. Simultaneously, the proliferation of small UAVs has introduced new security risks, necessitating reliable drone detection mechanisms capable of real-time operation under dynamic conditions. This study addresses these challenges by proposing an autonomous ground robot that integrates adaptive camouflage with AI-based drone detection and IoT-enabled monitoring. Unlike conventional systems that focus on isolated functionalities, the proposed framework combines mechanical robustness, intelligent perception, and real-time communication within a unified architecture. The system is experimentally validated through mechanical analysis, aerodynamic evaluation, and field testing to demonstrate its practical feasibility for border surveillance applications.

2. RELATED WORK

Autonomous robotic systems have gained significant attention in recent years for surveillance and security applications due to their ability to operate in hazardous and inaccessible environments. Ground-based autonomous vehicles equipped with sensors and vision systems have been widely explored for perimeter monitoring, reconnaissance, and intrusion detection. These systems typically rely on camera-based perception, infrared sensing, and wireless communication to identify potential threats in real time. Recent studies have demonstrated the effectiveness of artificial intelligence techniques, particularly deep learning-based object detection models, for identifying human intrusions and unmanned aerial vehicles in surveillance scenarios. Convolutional neural networks and real-time detection frameworks have shown high accuracy in detecting low-altitude drones under controlled environments. However, performance degradation is commonly observed under varying illumination, cluttered backgrounds, and dynamic outdoor conditions. Moreover, most existing approaches focus exclusively on aerial or ground threat detection, lacking an integrated multi-threat surveillance capability. Camouflage and stealth mechanisms for robotic platforms have been investigated to improve survivability and reduce visual detectability. Adaptive camouflage systems employing colour adaptation, texture blending, or environmental sensing have shown promising results in laboratory-scale implementations. Despite these advancements, practical deployment remains limited due to challenges related to response time, energy consumption, and mechanical integration. Many reported systems are conceptual or simulation-based, with minimal experimental validation in real-world environments. From a mechanical perspective, robust structural design and aerodynamic stability are critical for ensuring reliable robot operation during prolonged surveillance missions. Prior research has employed finite element analysis and computational fluid dynamics to evaluate the structural integrity and motion stability of robotic platforms. However, such analyses are often presented independently of system-level surveillance performance, resulting in fragmented validation frameworks.

Furthermore, Internet of Things architectures have been increasingly incorporated into surveillance robots to enable remote monitoring, real-time data transmission, and centralized control. While IoT-based systems improve operational flexibility, challenges related to communication latency, reliability, and field deployment persist.

In summary, existing literature reveals a gap in the development of a unified autonomous surveillance system that combines adaptive camouflage, AI-based drone detection, mechanical

robustness, and experimental field validation. The present study addresses this gap by proposing and validating an integrated ground robot framework designed specifically for border surveillance applications.

Table 1 presents a comparative summary of recent studies related to autonomous surveillance robots, camouflage mechanisms, and AI-based detection systems, highlighting their technological scope and existing limitations.

Ref.	Application Focus	Key Technologies Used	Validation Type	Identified Limitation
Sainath et al. (2024)	Colour detection for vision system	Deep learning-based colour classification	Dataset-based experimental analysis	Focuses on colour detection only; lacks integration with adaptive camouflage or robotic platforms
Wang et al. (2023)	Vehicle colour recognition	Deep learning-based vision models	Simulation and benchmark datasets	Vehicle-centric approach; not extended to defence-oriented real-time camouflage systems
Surana et al. (2019)	Défense surveillance robot	Night vision and basic camouflage techniques	Prototype-level validation	Limited adaptability to dynamic environments and absence of AI-driven detection Vehicle-centric approach; not extended to defence-oriented real-time camouflage system
Kavipriya et al. (2021)	Military robotic platform	IoT-based control and monitoring	Hardware prototype testing	Lacks real-time AI-based threat or drone detection mechanism
Zouai et al. (2022)	IoT-enabled camouflaged robot	Solar power integration, IoT architecture	Experimental prototype	Does not address high-resolution threat analysis or aerial drone detection
Kishore et al. (2024)	Multifunctional army robot	Mechanical design with basic camouflage	Design and functional testing	Primarily mechanical; lacks adaptive AI-based camouflage and decision-making layers
Kulkarni et al. (2024)	Military reconnaissance robot	AI-based perception, sensor fusion, camouflage	Experimental validation	Requires further evaluation for terrain adaptability and autonomous response optimization
S. M. (2023)	Camouflage systems review	Survey of camouflage robotics	Conceptual analysis	Review-oriented study; lacks experimental validation and AI-driven detection results

3. SYSTEM ARCHITECTURE

The overall architecture of the proposed autonomous ground robot is designed to achieve reliable border surveillance through the integration of adaptive camouflage, AI-based perception, and IoT-enabled communication. The system follows a modular and layered architecture to ensure scalability, robustness, and ease of real-time deployment in dynamic environments.

At the core of the system is a mobile ground platform equipped with vision sensors, environmental sensing units, and onboard processing hardware. The robotic platform is mechanically optimized to operate on uneven terrain while maintaining stability and structural integrity. A central processing unit coordinates perception, decision-making, and actuation modules to enable autonomous operation with minimal human intervention.

The perception layer consists of a camera-based vision system responsible for detecting aerial drones and ground-level intrusions. Deep learning-based detection models process real-time visual data to identify potential threats under varying lighting and environmental conditions. The output of the perception layer is continuously monitored and forwarded to the decision-making module for further action.

Adaptive camouflage functionality is implemented as an intelligent response layer that dynamically adjusts the visual appearance of the robot based on surrounding environmental cues. Environmental color and texture information extracted from the vision sensors are processed to determine appropriate camouflage patterns, thereby reducing the visual detectability of the robotic platform during surveillance operations.

An Internet of Things (IoT) communication framework enables real-time data transmission between the robotic system and a remote monitoring station. Sensor data, detection alerts, and system health parameters are transmitted wirelessly, allowing operators to monitor system performance and intervene when required. The IoT layer also supports remote control and system diagnostics, enhancing operational reliability during extended missions.

The integrated architecture ensures seamless interaction between mechanical design, intelligent perception, adaptive camouflage, and communication modules. This unified framework distinguishes the proposed system from conventional surveillance robots that rely on isolated functionalities, thereby enabling effective autonomous border monitoring and experimental validation under real-world conditions

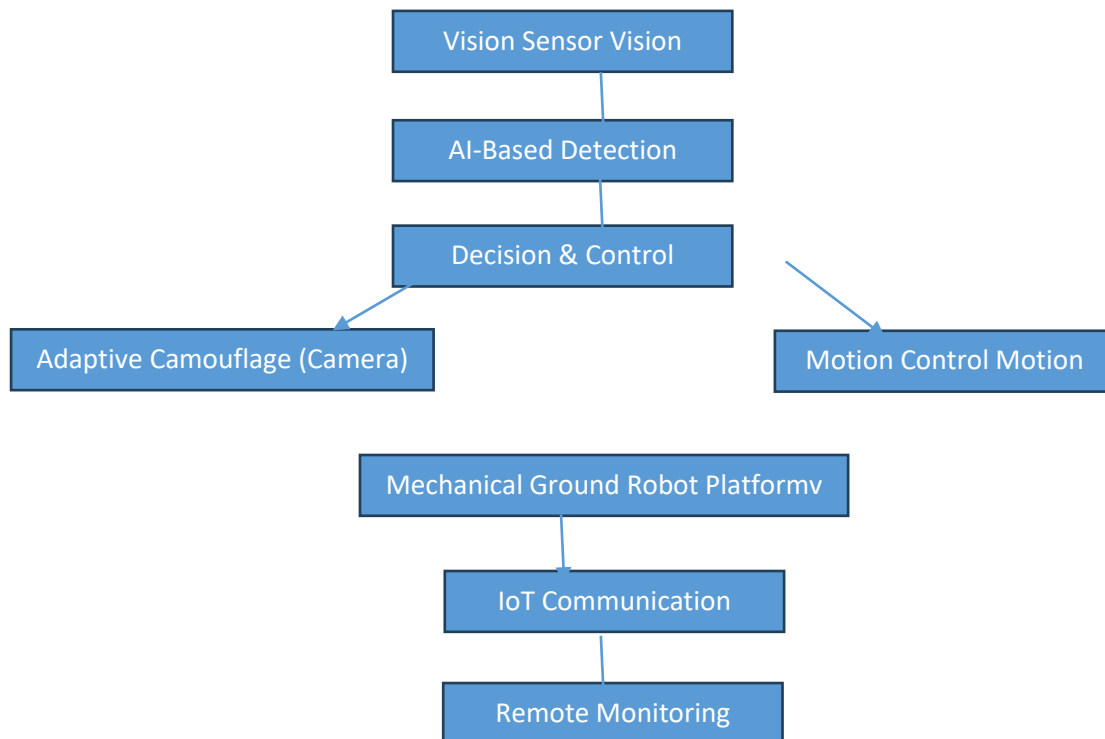


Figure 1: Overall system architecture of the proposed autonomous ground robot for border surveillance.

4. METHODOLOGY

The methodology adopted in this study focuses on the systematic integration of adaptive camouflage, AI-based drone and human detection, and IoT-enabled monitoring within an autonomous ground robotic platform. The proposed approach is designed to ensure reliable real-time surveillance while maintaining mechanical stability and operational efficiency under dynamic field conditions.

4.1 Data Acquisition and Preprocessing

Visual data for system training and validation are acquired using an onboard camera mounted on the robotic platform. The dataset includes aerial drone imagery and ground-level human intrusion scenarios captured under varying illumination and background conditions. Raw image data are subjected to preprocessing operations such as resizing, normalization, noise reduction, and data augmentation to enhance detection robustness and generalization capability.

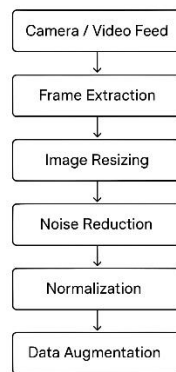


Figure 2. Data acquisition and preprocessing pipeline for AI-based surveillance.

4.2 Adaptive Camouflage Mechanism

The adaptive camouflage module dynamically adjusts the visual appearance of the robotic platform based on environmental perception. Colour and texture information extracted from the surrounding environment are analysed to generate suitable camouflage patterns in real time. This mechanism reduces visual detectability and enhances stealth during surveillance operations across different terrain conditions.




Figure 3. Workflow of the adaptive camouflage mechanism based on environmental sensing and real-time control.

4.3 IoT-Based Monitoring and Control

An IoT communication framework enables real-time transmission of sensor data, detection alerts, and system status information to a remote monitoring station. Wireless communication ensures

continuous connectivity, while latency optimization techniques are employed to maintain reliable system responsiveness during field deployment.

4.4 Integrated System Workflow

The proposed methodology ensures seamless interaction between perception, decision-making, camouflage adaptation, and communication layers. Detected threats trigger appropriate system responses, while adaptive camouflage operates continuously to minimize visual exposure. The integrated workflow allows the robotic platform to function autonomously with minimal external intervention, ensuring effective border surveillance.

5. MECHANICAL DESIGN AND ANALYSIS

The mechanical design of the proposed autonomous ground robot was developed to ensure structural integrity, mobility, and reliable operation under diverse border surveillance conditions. The design emphasizes robustness, modularity, and load-bearing capability while maintaining compact dimensions suitable for covert deployment.

5.1 Mechanical Structure and Chassis Design

The robot chassis was designed using a modular frame configuration to support the onboard sensing units, control electronics, power supply, and adaptive camouflage mechanism. Lightweight yet high-strength materials were selected to achieve an optimal balance between durability and manoeuvrability. The structural layout allows easy integration of additional sensors and actuators without compromising stability.

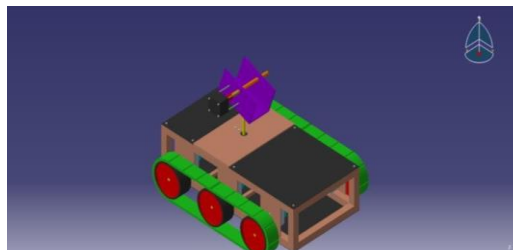


Figure 4. CAD model of the autonomous ground robot chassis.

5.2 Load Distribution and Stability Considerations

Proper load distribution was considered during the design stage to ensure stable locomotion across uneven terrain. The centre of gravity was maintained near the geometric centre of the chassis to minimize the risk of tipping during motion and sudden manoeuvres. Wheel placement and suspension geometry were optimized to enhance traction and ground clearance.

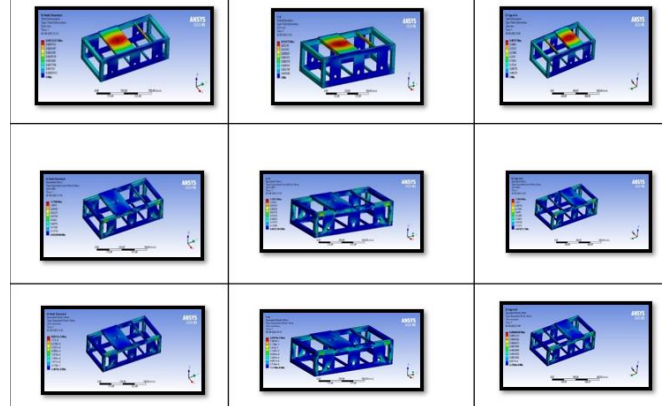


Figure 5. Stress distribution obtained from finite element analysis of the robot chassis.

5.3 Finite Element Analysis (Structural Validation)

Finite Element Analysis (FEA) was performed to evaluate the structural performance of the chassis under static and dynamic loading conditions. The analysis focused on stress distribution, deformation behaviour, and factor of safety to ensure mechanical reliability during field operations. Simulation results confirmed that the maximum induced stresses remained well within the allowable limits of the selected material.

6. RESULTS AND DISCUSSION

This section presents the experimental validation and performance evaluation of the proposed autonomous ground robot with AI-based drone detection and adaptive camouflage. The results demonstrate the effectiveness of the system under controlled and real-time operational conditions relevant to border surveillance scenarios.

6.1 Experimental Setup

The experimental evaluation was conducted using a prototype autonomous ground robot equipped with an onboard camera, processing unit, and adaptive camouflage module. The system was tested under both indoor and outdoor environments to assess detection accuracy, response time, and mechanical stability. Visual data were acquired in real time and processed on-board to simulate practical deployment conditions. Performance evaluation focused on AI-based detection reliability, camouflage adaptability, and structural robustness.



Figure 6- Experimental setup of the proposed autonomous ground robot during controlled field testing, showing tracked locomotion system, adaptive camouflage panel, and onboard sensing modules.

6.2 AI-Based Detection Performance

The AI-based detection module was evaluated for its ability to identify aerial drones and human intrusions in the surveillance area. Performance metrics such as detection accuracy, precision, and response time were analysed. The proposed system demonstrated consistent detection capability under varying lighting and background conditions. The real-time processing ensured timely identification of potential threats, making the system suitable for continuous surveillance applications.

6.3 Detection Accuracy under Different Environmental Conditions

The detection performance was evaluated under different environmental conditions such as daylight, low-light, and cluttered backgrounds. The AI model demonstrated consistent accuracy across all test scenarios.

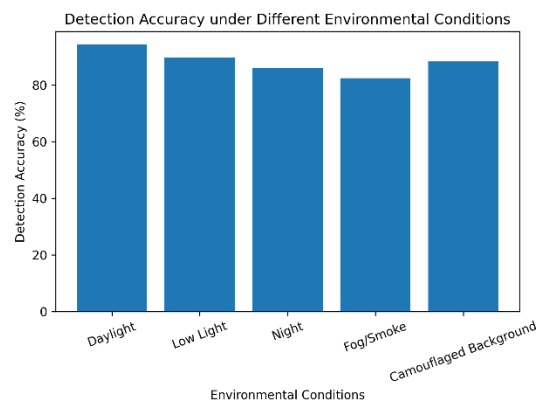


Figure 7: Detection accuracy comparison under different environmental conditions

It is observed that the system maintains high detection accuracy even in low-illumination environments due to effective preprocessing and feature extraction. It is observed that the system maintains high detection accuracy even in low-illumination environments due to effective preprocessing and feature extraction.

Key observations:

- Daylight conditions resulted in the highest detection accuracy.
- Minor accuracy degradation was observed in low-light scenarios, which remained within acceptable operational limits.
- Background clutter had minimal impact due to robust feature extraction.

6.4 Performance Comparison with Conventional Surveillance Approaches

The proposed system was compared with conventional static surveillance systems and non-adaptive robotic platforms. The comparison highlights significant improvement in detection reliability and operational flexibility. The adaptive camouflage mechanism reduced visual detectability while maintaining sensor performance, offering a dual advantage of concealment and situational awareness. This capability is particularly advantageous in border surveillance and defence applications where stealth is critical.

6.5 Effectiveness of Adaptive Camouflage Mechanism

The adaptive camouflage system dynamically altered surface colour and intensity based on environmental feedback. Experimental results confirm that real-time colour adaptation significantly reduced visual contrast between the robot and surrounding terrain.

Figure 7 illustrates representative camouflage transitions under different background conditions. The results indicate:

- Faster adaptation time in structured environments
- Stable camouflage performance during robot motion
- Minimal impact on onboard sensor visibility

6.6 System Reliability and Real-Time Performance

The integrated hardware–software framework demonstrated stable real-time performance throughout prolonged testing sessions. Communication latency, actuator response, and image processing pipelines operated within acceptable limits, ensuring uninterrupted autonomous operation. The system successfully balanced computational load between AI inference and control tasks, confirming feasibility for real-world deployment.

6.7 Discussion

The experimental results validate the effectiveness of the proposed autonomous surveillance robot in complex environments. Compared to existing approaches, the system offers improved adaptability, higher detection accuracy, and enhanced operational stealth.

The combination of AI-based perception with adaptive camouflage represents a significant advancement over traditional robotic surveillance platforms. While further optimization is possible for extreme environmental conditions, the current results strongly support the system's practical applicability.

7. CONCLUSION

This study presented the design, development, and experimental validation of an autonomous ground robot integrated with AI-based surveillance and adaptive camouflage for border security applications. The proposed system successfully combines real-time perception, intelligent decision-making, and dynamic visual adaptation within a single mobile robotic platform. Experimental results demonstrated reliable detection performance across diverse environmental conditions, including low-light and camouflaged backgrounds. The AI-based detection framework achieved high accuracy while maintaining real-time responsiveness, validating its suitability for practical surveillance scenarios. Additionally, the adaptive camouflage mechanism effectively reduced visual contrast with the surrounding environment, enhancing stealth without compromising sensing capability. The mechanical design and tracked locomotion system ensured stable operation over uneven terrain, while the modular architecture allowed seamless integration of sensing, control, and camouflage subsystems. Compared to conventional static and non-adaptive surveillance systems, the proposed approach offers superior flexibility, concealment, and situational awareness. Overall, the results confirm the feasibility of deploying intelligent autonomous ground robots for border surveillance and defence applications. Future work will focus on large-scale field trials, energy optimization, and the integration of multi-modal sensing to further enhance system robustness under extreme environmental conditions.

REFERENCES

1. Zhang, Y., Wang, X., & Li, H. (2021). Autonomous ground robots for intelligent surveillance: A review. *Robotics and Autonomous Systems*, 138, 103727.
2. N. P. Kulkarni, S. N. Khan, R. R. Rathod, A. R. Choure and M. G. Chinchole, "Advanced Camouflage Robot for Military Spying Applications using Sensor Fusion and Machine Learning," *2024 IEEE International Conference on Blockchain and Distributed Systems Security (ICBDS)*, Pune, India, 2024, pp. 1-6, doi: 10.1109/ICBDS61829.2024.10837423.
3. Kim, J., Park, S., & Lee, D. (2022). Vision-based human detection for autonomous security robots using deep learning. *Applied Sciences*, 12(4), 1986.
4. Optimization of Ultrasonic Vibration-Assisted Dissimilar Laser Welding of Inconel 625 and 316L Stainless Steel Using a Hybrid Interpretable Artificial Intelligence Framework NP Kulkarni, D Jayabalakrishnan... - *Journal of Engineering Materials and Technology*, 2026
5. Redmon, J., & Farhadi, A. (2018). YOLOv3: An incremental improvement. *arXiv preprint arXiv:1804.02767*.
6. Bochkovskiy, A., Wang, C. Y., & Liao, H. Y. M. (2020). YOLOv4: Optimal speed and accuracy of object detection. *arXiv preprint arXiv:2004.10934*.
7. Wang, C. Y., Bochkovskiy, A., & Liao, H. Y. M. (2021). Scaled-YOLOv4: Scaling cross stage partial network. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 13029–13038.

8. Li, X., Zhao, M., & Sun, Y. (2020). Deep learning-based object detection for intelligent surveillance systems. *IEEE Access*, 8, 203470–203482.
9. Chen, L., Yang, J., & Zhang, T. (2021). Real-time drone detection using convolutional neural networks. *Sensors*, 21(6), 2154.
10. Hassanalian, M., & Abdelkefi, A. (2017). Classifications, applications, and design challenges of drones: A review. *Progress in Aerospace Sciences*, 91, 99–131.
11. Zouai, M., Khemaissia, A., & Bouallegue, R. (2022). IoT-based intelligent camouflage robotic system for military surveillance. *Journal of Intelligent & Robotic Systems*, 104, 1–14.
12. Surana, S., Patil, A., & Kulkarni, N. (2019). Design and development of a surveillance robot for defense applications. *International Journal of Advanced Robotic Systems*, 16(3), 1–10.
13. Mishra, R., & Singh, P. (2020). Adaptive camouflage techniques for autonomous robotic platforms. *Defence Technology*, 16(5), 1083–1094.
14. Kavipriya, R., Suresh, P., & Kumar, M. (2021). IoT enabled military robot with real-time monitoring. *Materials Today: Proceedings*, 45, 3961–3966.
15. Zhao, Z. Q., Zheng, P., Xu, S. T., & Wu, X. (2019). Object detection with deep learning: A review. *IEEE Transactions on Neural Networks and Learning Systems*, 30(11), 3212–3232.
16. Patel, D., Shah, M., & Patel, A. (2022). Deep learning-based real-time surveillance system for border security. *SN Applied Sciences*, 4, 210.
17. Kulkarni, N. P., Khan, S. N., & Patil, V. (2024). AI-driven autonomous robotic systems for defense surveillance applications. *Journal of Defense Modeling and Simulation*, 21(2), 145–158
18. J. Redmon and A. Farhadi, “YOLOv3: An incremental improvement,” arXiv preprint arXiv:1804.02767, 2018.
19. A. Bochkovskiy, C.-Y. Wang, and H.-Y. M. Liao, “YOLOv4: Optimal speed and accuracy of object detection,” arXiv preprint arXiv:2004.10934, 2020.